


**NS-200A/NS-300 運輸帶系統 Conveyor System**  
**NS-200A 架空衣架運輸帶 Upper Hanger Conveyor**  
**NS-300 平面運輸帶 Lower Belt Conveyor**

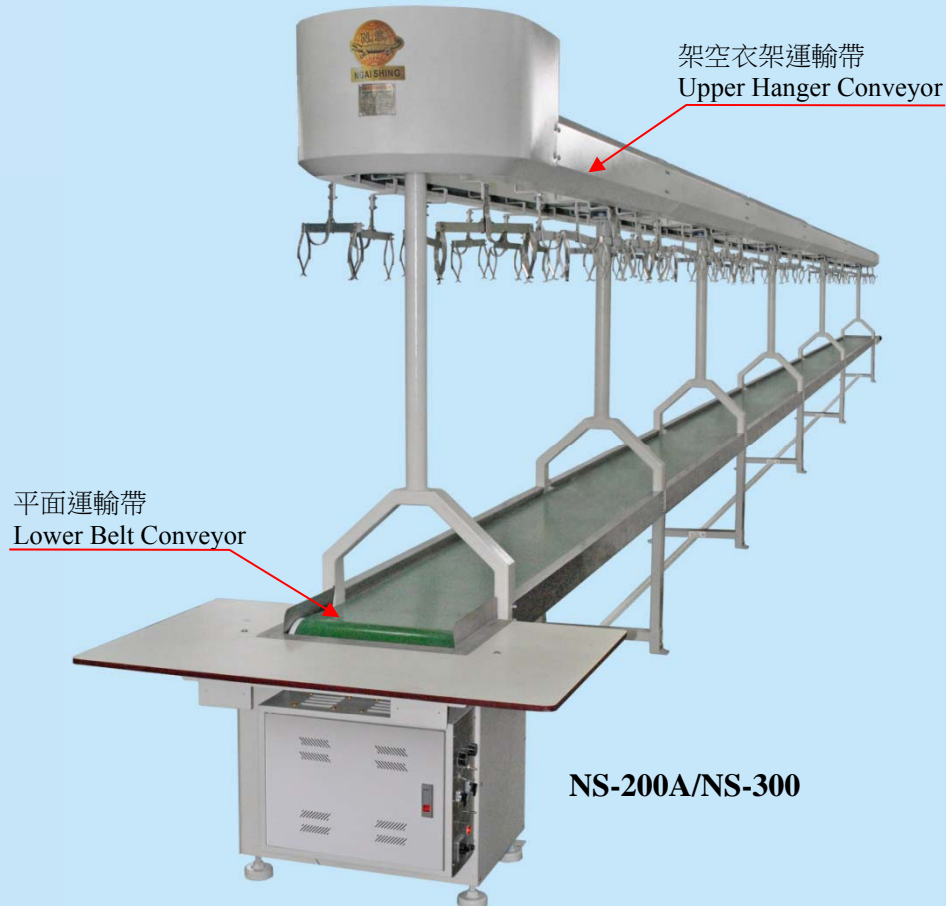

**NS-200A/NS-300**

**NS-200A/NS-300:**

- 增強熨部衣物運輸自動化，提高了工作效率，節省人工勞力；搭配燙台、摺衫台等機器使用實現對衣物整熨、包裝等的流水線式加工、生產
- 避免了人工搬運可能造成的皺摺及髒污
- 標準長度：8尺一段
- 架空衣架運輸帶
  - 標準鏈寬：18"
  - 循環式運轉輸送衣物至其它工位或部門
  - 特殊的輸送鏈結構，更利於保持衣服整潔，不會污損衣物
- 平面運輸帶
  - 標準帶寬：18"、24"
  - 將熨摺好的衣物輸送至包裝部，最適合於恤衫及針織衫的自動輸送

**跟機件：**速度控制器系統、O-F-03-2衣架x5pcs

**選購件：**各種衣架

**NS-200A/NS-300:**

- Maximize automation of pressed garments transportation thus boost efficiency and save labor. Used in combination with ironing table, shirt folding table, etc. to realize flowing line operation of garment pressing, packing etc.
- Minimized risk of wrinkles and contamination due to human handling
- Standard length: 8ft per section
- Upper Hanger Conveyor
  - Standard chain width: 18"
  - Circulation transportation of garment to another station or department
  - Special conveyor structure that will protect garment from contamination and damage
- Lower belt conveyor
  - Standard belt width: 18", 24"
  - Transport pressed and folded garment to packing department, ideal for automatic transportation of shirt and knitwear

**Standards:** Speed control system, O-F-03-2 hanger x5pcs

**Options:** Various hangers



**NS-200A**



**NS-300**

- 增強熨部衣物運輸自動化，提高了工作效率，節省人工勞力；搭配燙檯、摺衫台等機器使用實現對衣物整熨、包裝等的流水線式加工、生產
- 避免了人工搬運可能造成的皺摺及髒污
- 標準長度：8尺一段
- **NS-200A** 架空衣架運輸帶
  - 標準鏈寬：18"
  - 循環式運轉輸送衣物至其它工位或部門
  - 特殊的輸送鏈結構，更利於保持衣服整潔，不會污損衣物
- **NS-300** 平面運輸帶
  - 標準帶寬：18"、24"
  - 將熨摺好的衣物輸送至包裝部，最適合於恤衫及針織衫的自動輸送

**跟機件：**速度控制器系統、O-F-03-2衣架x5pcs(NS-200A系列)

**選購件：**各種衣架

- Maximize automation of pressed garments transportation thus boost efficiency and save labor. Used in combination with ironing table, shirt folding table, etc. to realize flowing line of garment pressing, packing etc.
- Minimized chance of wrinkle and contamination due to human handling
- Standard length: 8ft per section
- **NS-200A** Upper Hanger Conveyor
  - Standard chain width: 18"
  - Circulation transport of garment to another station or department
  - Special conveyor structure that will protect garment from contamination and damage
- **NS-300** lower belt conveyor
  - Standard belt width: 18", 24"
  - Transport pressed and folded garment to packing department, ideal for automatic transportation of shirt and knitwear

**Standards:** Speed control system, O-F-03-2 hanger x5pcs(NS-200A series)

**Options:** Various hangers




特殊防塵設計，輸送鏈條上的油污不會滴落到衣服上，保持衣物清潔  
Special dust proof structure to prevent oil from dropping to the garment from the chain and keep the garment clean

#### 速度控制器系統：


速度控制系統為本機增強功能，變頻器結合控制元件等使用，可實現輸送帶的正/反轉、三段定速及無段變速的功能，適用於NS-200A/NS-300、NS-200A、NS-300。

#### Speed Control System:

It is enhanced function of this machine. By using inverter in combination with control elements, the conveyor can run forward and backward, and it is possible for users to switch between three-step variation and continuous speed variation. This system applies to NS-200A/NS-300.

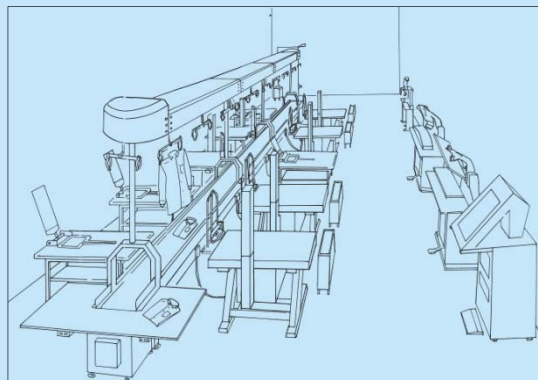

NS-200A/NS-300男裝摺裝恤衫  
NS-200A/NS-300 folding and packing men's shirt

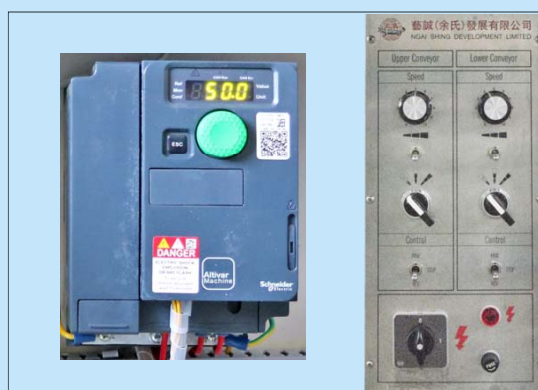

NS-200A/NS-300

#### 選購件 Options:

衣架：長:14 1/2"

四種衣架均為NS-200A/NS-300、NS-200A選購件，用戶可根據實際需要選購。

Hanger: length: 14 1/2"

Below 4 types of hangers are the accessories of NS-200A/NS-300, NS-200A, users could place order based on their own requirements.




1.單鉤雙掛衣架

Single-hook double-support hanger



2.單鉤雙夾衣架

Single-hook double-clip hanger



3.雙鉤四夾衣架

Double-hook four-clip hanger



4.雙鉤四掛衣架

Double-hook four-support hanger

型號 Model	規格 Specification	電源 Power Supply	馬達功率(HP) Motor Power	運輸帶長度(foot) Belt Conveyor Length	運輸帶速度(m/min) Belt Conveyor Speed	標準長度每段(foot) Standard Length of Each Section
NS-200A/ NS-300	運輸長度Conveying length < 72'	1PH/220V/50Hz	1.5x2	32~96	0.9~9 (架空衣架運輸帶Upper Hanger Conveyor)	8
	運輸長度Conveying length ≥ 72'	3PH/380V/50Hz	2x2		1.8~18 (平面運輸帶Lower Belt Conveyor)	
NS-200A	運輸長度Conveying length < 72'	1PH/220V/50Hz	1.5	32~96	0.9~9	8
	運輸長度Conveying length ≥ 72'	3PH/380V/50Hz	2			
NS-300	運輸長度Conveying length < 72'	1PH/220V/50Hz	1.5	32~96	1.8~18	8
	運輸長度Conveying length ≥ 72'	3PH/380V/50Hz	2			



藝誠(余氏)發展有限公司  
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,

Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com

Fax: (852) 2785 3149 Http://www.ngaishing.com