

NS-2610 粘合機 Fusing Machine




- 適用於領、下級、袖口等裁片粘合
- 滾筒運輸帶配合自動輸送帶平衡系統，降低運輸帶磨損，提升運行效率
- 兩次加壓，加壓壓力可獨立調節，粘合效果佳
- 數字式溫度控制器獨立調節上、下加熱區溫度，滿足不同布機對粘合溫度要求
- 輸送帶速度可調校，滿足不同布機對粘合速度要求
- 前面入料、收料，操作方便，工作效率高
- 配獨立冷水機，冷卻效果佳




- Suitable for fusing press of cut pieces such as collar, collar band and cuff
- The roller conveyor belt in coordination with automatic conveyor belt balancing system to reduce belt wear and improve operational efficiency
- Double press with independently adjustable pressure to achieve optimum fusing effect
- Equipped with digital thermostats for independent temperature control of upper & lower heating area to meet the fusing temperature demand of various fabrics and interlinings
- With adjustable speed of conveyor belt to meet the fusing speed demand of various fabrics and interlinings
- Front loading and unloading design to facilitate operation and boost efficiency
- Equipped with independent chiller for excellent cooling effect




入料 Feeding

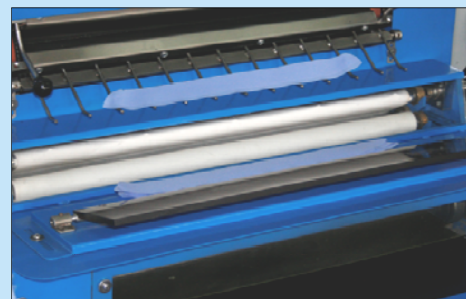

收料 Collecting

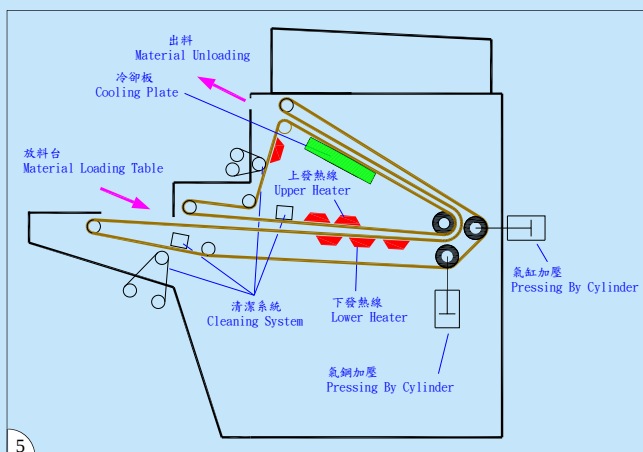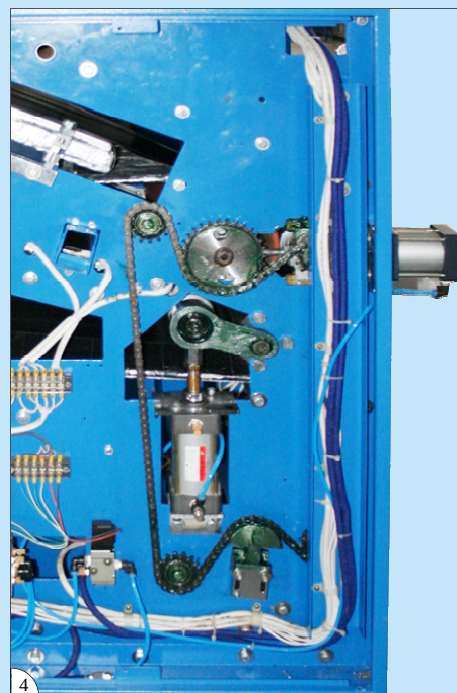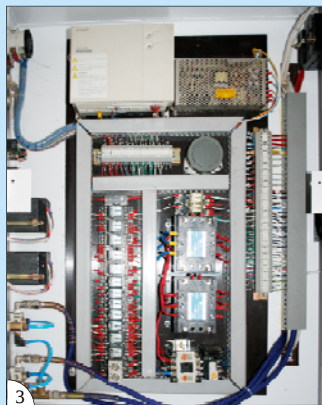

- 1、控制面板 Control Panel
- 2、冷水機 Water Cooling Device
- 3、優質電器元件 Optimum Electric Elements
- 4、加壓系統 Pressing System
- 5、工作原理圖 Working Principle Diagram

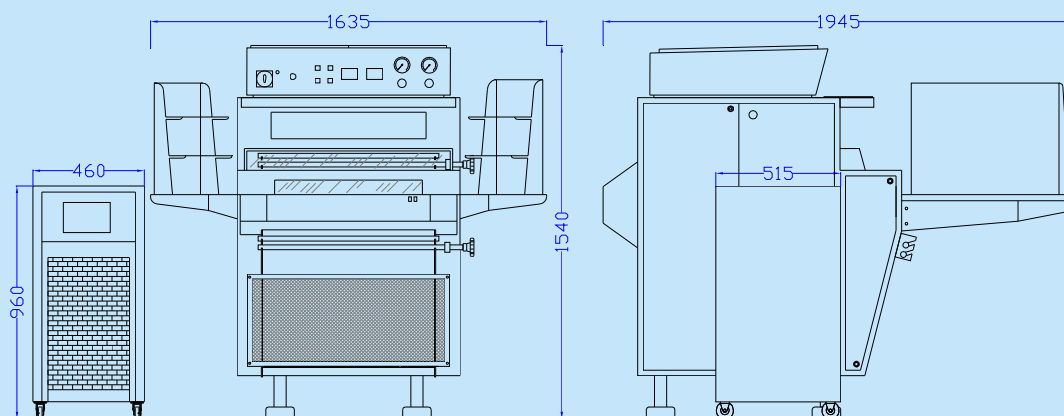

型號 Model	電源 Power Supply	總功率(kW) Total Power	壓縮空氣壓力 (kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	帶速(m/min) Belt Speed	粘合寬度(mm) Fusing Width	最高設計溫度(°C) Max. Design Temp.	機身尺寸(mm) Machine size
NS-2610	3PH/380V/50Hz	9	5	5	0.7 ~ 2.6	600	200	1635x1945x1540



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com